


**AMERICAN LINEAR MANUFACTURERS
STANDARD HOLE PATTERN - P MODEL
ENGLISH / METRIC**

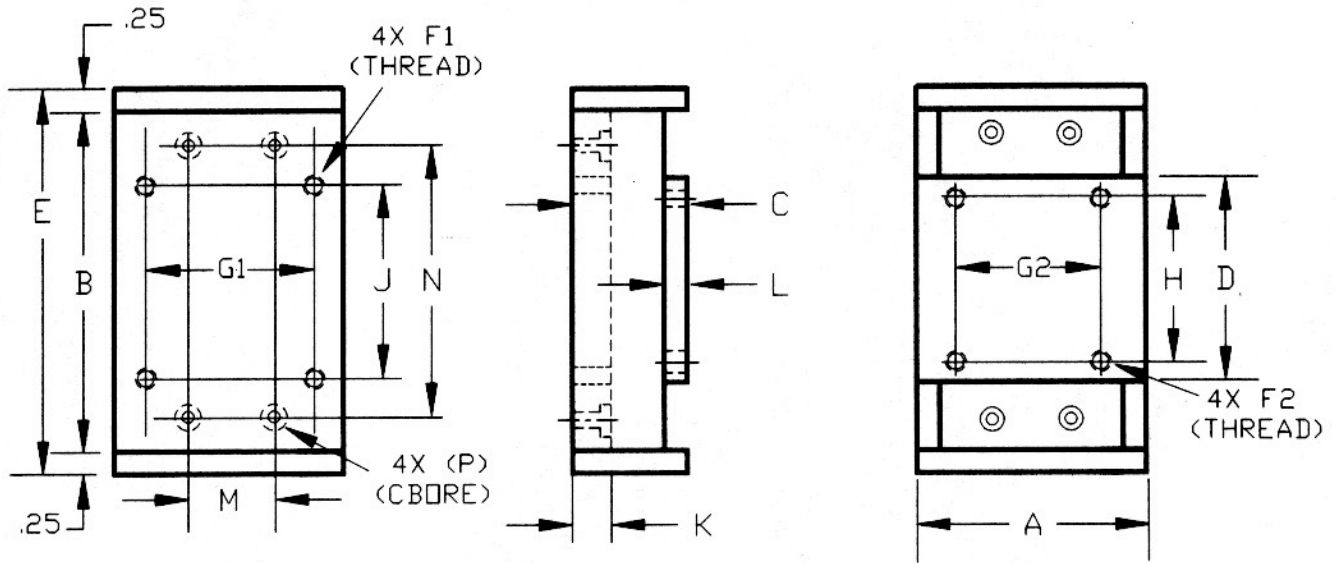

| MODEL | A | B | C | D | E | F1&F2 | G1&G2 | H | J | K | L | M | N | P |
|--------------|-----------------|------------------|----------------|------------------|-----------------|----------------|------------------|------------------|-------------------|----------------|----------------|-----------------|-------------------|-------------------------|
| P(A/C)2-3-1 | | 3.00 (76.2) | | 2.00 (50.8) | 3.5 (88.9) | | | 1.500 (38.1) | 1.500 (38.1) | | | | 2.400 (61.0) | #8 (M4) |
| P(A/C)2-4-1 | 2.00 (50.8) | 4.00 (101.6) | 0.98 (24.8) | 3.00 (76.2) | 4.5 (114.3) | 8-32 (M4) | 1.500 (38.1) | 2.000 (50.8) | 2.500 (63.5) | .330 (8.4) | .205 (5.2) | 1.000 (25.4) | 3.400 (86.4) | C'BORE .300 x .17 DP |
| P(A/C)2-6-2 | | 6.00 (152.4) | | 4.00 (101.6) | 6.5 (165.1) | | | 3.000 (76.2) | 4.000 (101.6) | | | | 5.000 (127.0) | |
| P(A/C)3-4-1 | | 4.00 (101.6) | | 3.00 (76.2) | 4.5 (114.3) | | | 2.000 (50.8) | 2.500 (63.5) | | | | 3.250 (82.6) | #10 (M5) |
| P(A/C)3-5-1 | 3.00 (76.2) | 5.00 (127.0) | 1.25 (31.7) | 4.00 (101.6) | 5.5 (139.7) | 10-32 (M5) | 2.000 (50.8) | 3.000 (76.2) | 3.500 (88.9) | .334 (8.5) | .405 (10.3) | 1.250 (31.8) | 4.250 (108.0) | C'BORE .340 x .20 DP |
| P(A/C)3-6-2 | | 6.00 (152.4) | | 4.00 (101.6) | 6.5 (165.1) | | | 3.000 (76.2) | 4.000 (101.6) | | | | 5.000 (127.0) | |
| P(A/C)4-6-1 | | 6.00 (152.4) | | 5.00 (127.0) | 6.5 (165.1) | | | 4.000 (101.6) | 3.000 (76.2) | | | | 5.250 (133.4) | #10 (M5) |
| P(A/C)4-8-2 | 4.00 (101.6) | 8.00 (203.2) | 1.44 (36.5) | 6.00 (152.4) | 8.5 (215.9) | 10-32 (M5) | 3.000 (76.2) | 5.000 (127.0) | 6.000 (152.4) | .374 (9.5) | .477 (12.1) | 2.250 (57.2) | 7.000 (177.8) | C'BORE .340 x .20 DP |
| P(A/C)4-10-2 | | 10.00 (254.0) | | 8.00 (203.2) | 10.5 (266.7) | | | 6.000 (152.4) | 6.000 (152.4) | | | | 9.000 (228.6) | |
| P(A/C)4-12-3 | | 12.00 (304.8) | | 9.00 (228.6) | 12.5 (317.5) | | | 7.000 (177.8) | 7.000 (177.8) | | | | 10.000 (254) | |
| P(A/C)6-8-2 | | 8.00 (203.2) | | 6.00 (152.4) | 8.5 (215.9) | | | 4.500 (114.3) | 6.000 (152.4) | | | | 7.000 (177.8) | 1/4" (M6) |
| P(A/C)6-12-4 | 6.00 (152.4) | 12.00 (304.8) | 2.00 (50.8) | 8.00 (203.2) | 12.5 (317.5) | 1/4-20 (M6) | 4.500 (114.3) | 6.000 (152.4) | 8.000 (203.2) | .444 (11.3) | .804 (20.4) | 3.500 (88.9) | 9.000 (228.6) | C'BORE .403 x .26 DP |
| P(A/C)6-16-6 | | 16.00 (406.4) | | 10.00 (254.0) | 16.5 (419.1) | | | 8.000 (203.2) | 10.000 (254.0) | | | | 12.000 (304.8) | |

**DIMENSIONS IN INCHES & (MM)
SIZE DIMENSIONS ± .010 / (.25)
HOLE CENTER TO CENTER ± .005 / (.13)**