


AMERICAN LINEAR MANUFACTURERS STANDARD HOLE PATTERNS -X MODEL

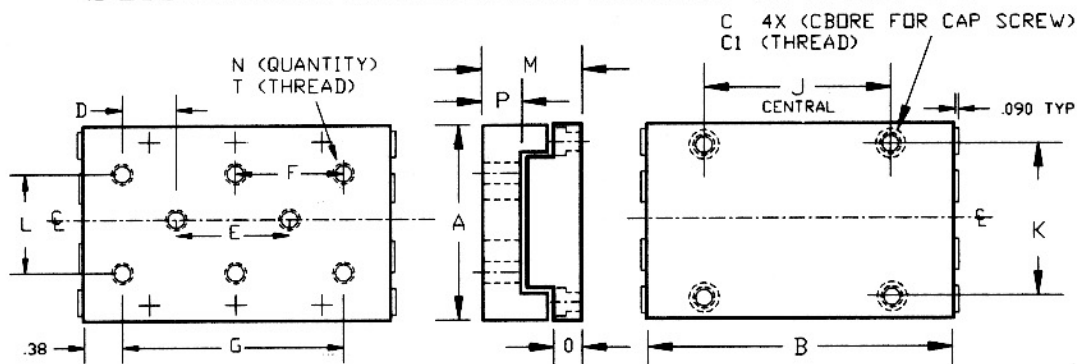

MODEL	A	B	N	T	D	E	F	G	C	C1	J	K	L	M	O	P
X(A/C)2-2-1	2.00 (50.8)	2.00 (50.8)	6	#8-32 (M4)	0.313 (7.9)	0.625 (15.8)	-	1.250 (31.7)	#8 (M4)	-	1.325 (33.6)	1.375 (34.9)	0.750 (19.0)	0.985 (25.0)	0.205 (5.2)	0.330 (8.4)
X(A/C)2-3-2		3.00 (76.2)			0.563 (14.3)	1.125 (28.5)	1.125 (28.5)	2.250 (57.7)			2.000 (50.8)					
X(A/C)2-4-3		4.00 (101.6)			0.813 (20.6)	1.625 (41.2)	1.625 (41.2)	3.250 (82.5)			3.000 (76.2)					
X(A/C)2-5-4		5.00 (127.0)			1.063 (27.0)	2.125 (53.9)	2.125 (53.9)	4.250 (107.9)			4.000 (101.6)					
X(A/C)2-6-5		6.00 (152.4)			1.313 (33.3)	2.625 (66.6)	2.625 (66.6)	5.250 (133.3)			5.000 (127.0)					
X(A/C)2-7-6		7.00 (177.8)			1.563 (39.7)	3.125 (79.3)	3.125 (79.3)	6.250 (158.7)			6.000 (152.4)					

X(A/C)2-8-7 THRU X(A/C)2-12-11 AVAILABLE - CONSULT FACTORY

X(A/C)3-3-2	3.00 (76.2)	3.00 (76.2)	6	#10-32 (M5)	0.563 (14.3)	1.125 (28.5)	-	2.250 (57.1)	#10 (M5)	1/4-28	2.000 (50.8)	2.000 (50.8)	1.250 (31.7)	1.250 (31.7)	0.405 (10.2)	0.334 (8.4)
X(A/C)3-4-3		4.00 (101.6)			0.813 (20.6)	1.625 (41.2)	1.625 (41.2)	3.250 (82.5)			3.000 (76.2)					
X(A/C)3-5-4		5.00 (127.0)			1.063 (27.0)	2.125 (53.9)	2.125 (53.9)	4.250 (107.9)			4.000 (101.6)					
X(A/C)3-6-5		6.00 (152.4)			1.313 (33.3)	2.625 (66.6)	2.625 (66.6)	5.250 (133.3)			5.000 (127.0)					
X(A/C)3-7-6		7.00 (177.8)			1.563 (39.7)	3.125 (79.3)	3.125 (79.3)	6.250 (158.7)			6.000 (152.4)					

X(A/C)3-8-7 THRU X(A/C)3-12-11 AVAILABLE - CONSULT FACTORY

X(A/C)4-4-3	4.00 (101.6)	4.00 (101.6)	6	#10-32 (M5)	0.813 (20.6)	1.625 (41.2)	-	3.250 (82.5)	#10 (M5)	1/4-28	2.750 (69.8)	2.750 (69.8)	1.750 (44.4)	1.437 (36.5)	0.445 (11.3)	0.332 (8.4)
X(A/C)4-6-5		6.00 (152.4)			1.313 (33.3)	2.625 (66.6)	2.625 (66.6)	5.250 (133.3)			5.000 (127.0)					
X(A/C)4-8-7		8.00 (203.2)			1.813 (46.0)	3.625 (92.0)	3.625 (92.0)	7.250 (184.2)			7.000 (177.8)					

X(A/C)4-10-9 THRU X(A/C)4-36-35 AVAILABLE - CONSULT FACTORY

X(A/C)6-6-5	6.00 (152.4)	6.00 (152.4)	6	1/4-28 (M6)	1.313 (33.3)	2.625 (66.6)	-	5.250 (133.3)	1/4 (M6)	5/16-24	4.500 (114.3)	4.500 (114.3)	3.500 (88.9)	2.000 (50.8)	0.804 (20.4)	0.444 (11.3)
X(A/C)6-8-7		8.00 (203.2)			1.813 (46.0)	3.625 (92.0)	3.625 (92.0)	7.250 (184.1)			6.000 (152.4)					
X(A/C)6-10-9		10.00 (254.0)			2.313 (58.7)	4.625 (117.4)	4.625 (117.4)	9.250 (234.9)			8.000 (203.2)					

X(A/C)6-12-11 THRU X(A/C)6-36-35 AVAILABLE - CONSULT FACTORY

DIMENSIONS IN INCHES & (MM) - SIZE DIMENSIONS ± .010 / (.25) - HOLE CENTER TO CENTER ± .005 / (.13)