



DOUBLE "V" RECIRCULATOR COMPONENT SETS

ALM

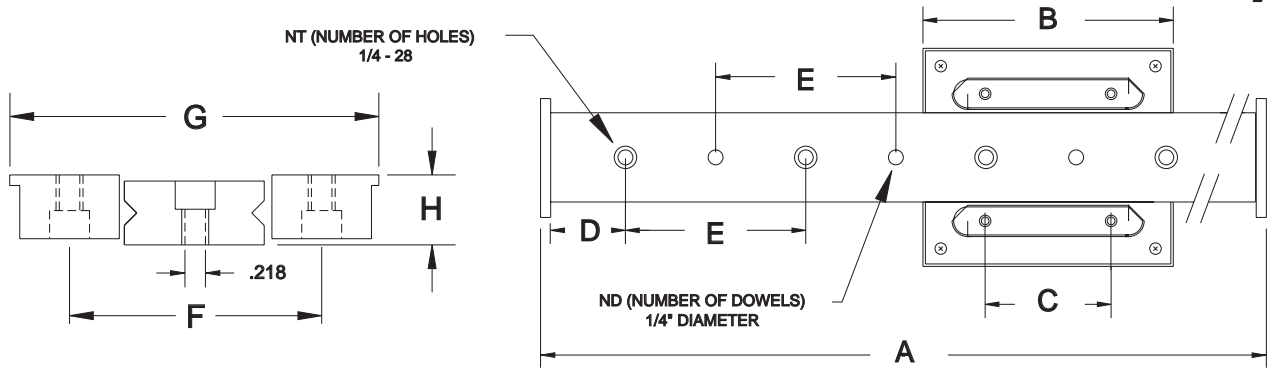

MODEL NO.	ROLLER DIA.	A	B	C	D	E	F	G	H	N	MAXIMUM LOAD (lbs)	LENGTH OF TRAVEL
RC4-DV-12		12.562 319.0	3.937 100.0							3	965	8.00
RC4-DV-24		24.370 619.0	3.937 100.0							6	965	20.00
RC4-DV-36	.236	36.181 918.0	3.937 100.0	1.969	2.341	3.937	2.50	3.676	.750	9	965	32.00
RC6-DV-12	6.0	12.562 319.0	5.818 147.7	50.0	59.4	100.0	63.0	93.3	19.0	3	1925	6.00
RC6-DV-24		24.370 619.0	5.818 147.7							6	1925	18.00
RC6-DV-36		36.181 918	5.818 147.7							9	1925	30.00

STANDARD SET INCLUDES (2) RECIRCULATING BEARINGS, (1) DOUBLE "V" RAIL, AND (2) ENDPICES

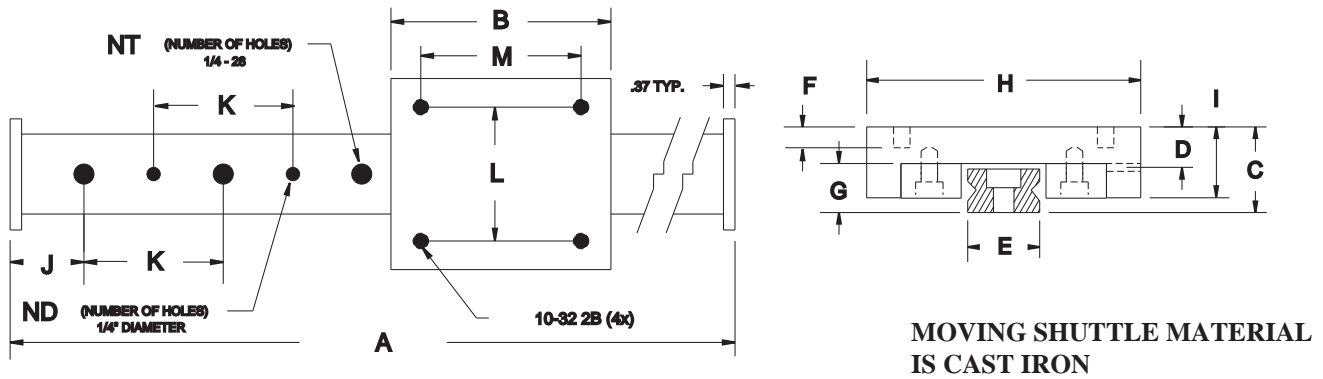

DOUBLE "V" RECIRCULATOR ASSEMBLY

MODEL NO.	ROLLER DIA.	A		B		C	D	E	F	G	H	I	J	K	L	M	N	MAXIMUM LOAD LBS.	LENGTH OF TRAVEL
		in	mm	in	mm														
DRCA-412		12.562	319.0	4.00	101.0												3	965	8.00
DRCA-424	.236	24.370	619.0	4.00	101.0	1.400	.670	1.643	.500	.748	4.724	1.220	2.341	3.937	3.00	3.00	6	965	20.00
DRCA-436		36.181	918.0	4.00	101.0												9	965	32.00
DRCA-612		12.562	319.0	6.00	154.4												3	1925	6.00
DRCA-624	6.0	24.370	619.0	6.00	154.4	35.5	17.0	41.0	12.7	19.0	119.9	31.0	59.4	100.0	76.2	76.2	6	1925	18.00
DRCA-636		36.181	918.0	6.00	154.4												9	1925	30.00